

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/SE05/000279

International filing date: 25 February 2005 (25.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: SE
Number: 0400442-0
Filing date: 25 February 2004 (25.02.2004)

Date of receipt at the International Bureau: 10 March 2005 (10.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

PRVPATENT- OCH REGISTRERINGSVERKET
Patentavdelningen**Intyg
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Bengt Adolfsson, Stockholm SE
Applicant (s)

(21) Patentansökningsnummer 0400442-0
Patent application number

(86) Ingivningsdatum 2004-02-25
Date of filing

Stockholm, 2005-03-01

För Patent- och registreringsverket
For the Patent- and Registration Office


Gunilla Larsson

Avgift
Fee

**PATENT- OCH
REGISTRERINGSVERKET
SWEDEN**Postadress/Adress
Box 5055
S-102 42 STOCKHOLMTelefon/Phone
+46 8 782 25 00
Vx 08-782 25 00Telex
17978
PATOREG STelefax
+46 8 666 02 86
08-666 02 86

Sealing arrangement for relatively movable parts and device including such a sealing arrangement.

Field of the invention

5 This invention relates to a sealing arrangement. It also relates to a device having relatively movable parts including such a sealing arrangement.

Background of the invention

10 In this specification and in the annexed claims "relatively movable parts" relates to devices having parts that are relatively movable through relative linear or relative rotational movement or a combination thereof. "Reciprocating piston device" includes compressors and other pressurizing
15 devices as well as engines having relatively movable piston and cylinder irrespective which element is stationary and which element is movable.

In previously known devices having relatively movable parts,
20 and in particular reciprocating piston devices such as piston compressors, normally a sealing arrangement is provided wherein at least one sealing ring is positioned in a circumferential groove at the outside of the piston or in the cylinder in order to provide a seal between the movable piston
25 and the cylinder wall. In particular in respect of piston compressors working with moderate or high pressure the working life of the sealing arrangement before exchange or service is highly dependent on wear of the seal ring as well as wear of the meeting surface of the cylinder wall or rod.

30 Excessive wear of the sealing ring and subsequent failure of the sealing arrangement results in need for replacement and/or service. As a consequence, this leads to a period of downtime

of a device including the sealing arrangement such as a compressor together with related machines during the replacement time. Altogether this results in increased costs and discontinued production or operation. The corresponding problems occur in other reciprocating piston devices as intended in this specification.

As a representative of background art, FR-1 543 403 may be mentioned. Herein pressure acting on the inside of a number of piston rings is limited by means of a valve arrangement.

In sealing arrangements for relatively rotational members such as e.g. rotary shaft sealing arrangements corresponding problems occur, in particular the problems are important if there is a great pressure difference between the sides of the sealing arrangement.

Aim and most important features of the invention

It is an aim of this invention to provide a sealing arrangement according to the above which is an improvement of previously known sealing arrangements. In particular it is an aim to increase the working life of the sealing ring in order to avoid the drawbacks mentioned above.

It is also an aim of the invention to provide a reciprocating piston device that includes a sealing arrangement having an extended working life.

These aims are achieved according to the invention through the features of the characterizing portions of the independent claims.

This way the forces acting on the sealing ring resulting from pressure on the one side of the sealing ring are counteracted by the supplied liquid providing a balancing force on the other side of the seal. Hereby axial and radial forces as well as twisting and wringing of the sealing ring, are avoided or at least reduced. The pressure provided by the sealing ring against the moving opposing surface can essentially be reduced as far as to the preset pressure built-in into the seal.

In previously known devices having relatively movable parts such as piston compressors, these forces tend to press the sealing ring, normally a piston ring, against the meeting surface, normally the cylinder wall, thereby inducing wear of the piston ring as well as of the cylinder wall surface. As a contrast, according to the invention this wear is decreased to a great extent.

In case of a sealing arrangement wherein, during operation, a flow of the supplied liquid passes the sealing ring, the sealing ring is more or less floating on a flow of liquid, whereby little or no friction will exist between the sealing ring and the sealing ring groove. The sealing ring can thereby move more independently of the groove, without any mentionable friction. Thereby also the load on the sealing ring normally resulting from a moving & tilting piston can be reduced. Otherwise, when the piston moves / tilts sideways, the friction between the sealing ring in the sealing ring groove at the low pressure side, forces the seal against the moving cylinder surface as the piston tilts.

The pressure on the sealing ring against the moving surface combined with the traveled distance and, in most cases, also

temperature are to be considered when calculating the lifetime of a sealing ring.

In general in reciprocating piston devices forming the background art, the pressure differential between the high pressure side and the low pressure side does not only force the sealing ring against the moving radial surface, but also against the bottom of the groove at the low pressure side. The radial pressure of the sealing ring against the moving surface increases with increasing pressure and thus causes a pulsating pressure load on the sealing ring over the piston cycle. This radial pressure is normally approximately the average of the difference pressure between the high pressure and the low pressure values multiplied with the radial surface area.

Further, due to necessary clearance between piston and cylinder wall, the axially support from the low pressure side does not cover the whole sealing ring which thereby will twist with the pulsating pressure. This results in a varying contact angle between the sealing ring and the moving opposite surface, varying the contact surface between the sealing ring and the opposite wall and the thus load per surface unit.

Increased wear is not only the result of increased friction, but also indirectly a result of increased temperature caused by the friction and often the raised temperature in the pumped media. This changes the wear characteristics of the material in the seal and is particularly important in cases of synthetic seals. Further, according to the aspect of the invention where there is arranged for a liquid flow passing the sealing ring, the temperature is controlled by the liquid flow in the region of the sealing arrangement.

The invention is advantageous by at least reducing: Pressure differential over the sealing ring; Twisting of the sealing ring; Friction between the sealing ring and the sealing ring groove; Sealing ring temperature.

5

The liquid supply can be provided either from an internal or from an external source.

10

In an exemplary embodiment, the liquid supply device is integral with the reciprocating piston device in that it includes an enlarged piston portion in co-operation with an enlarged cylinder portion in a position axially at a greater distance from the pressure chamber than the position of the piston seal. This embodiment provides a compact solution creating a simultaneously matching pressure on both sides of the seal over the stroke, with simplified channeling arrangements.

15

Inclusion of an external pump for liquid supply, on the other hand, makes it possible to improve liquid supply operation after need and desire. No or at least reduced pulsation will be achieved.

20

A simple way of controlling the flow of the liquid is by means of the sealing ring itself. In case of an integral liquid supply and outflow through the sealing ring groove, increased flow due to increased piston speed over the pumping stroke, will press the sealing ring higher up in the groove so as to open up successively larger outlet areas. Thus the sealing ring will float on the flow of liquid being pumped under it and simultaneously match the pressure from the pressurizing chamber.

25

30

The inclusion of a pressure control valve device for the
 supplied liquid makes it possible to control the liquid
 pressure and/or the liquid flow as desired, for instance, so
 that it does not exceed the pressure at the high pressure side
 5 or inside the pressure chamber, thereby limiting the amount of
 liquid that may pass from the second to the first side or
 specifically enter the pressure chamber passing the piston
 seal during operation. Further, the design of a separate
 pressure balancing valve may simplify the design of the seal
 10 and avoid cavitations problems emanating from liquid flow
 immediately under the seal.

Such a valve may be positioned in the piston but may as well
 be positioned in an outlet channel or cannels which start (s)
 15 in the cylinder wall.

More features and advantages of the invention will come clear
 from the following description of embodiments.

20 Brief description of drawings

The invention will now be described at the background of
 exemplary embodiments and with reference to the drawings,
 wherein:

25 Fig. 1 shows, in an axial section, an exemplary embodiment of
 a compressor as the reciprocating piston device according to
 the invention with the piston in a first position,

Fig. 2 shows the embodiment in Fig. 1 with the piston in a
 30 second position,

Fig. 3 shows an enlarged partial sectional view of the region
 of the piston seal in Figs. 1 and 2 in an upper position,

Fig. 4 shows the region of Fig. 3 in a lower position,

Fig. 5 shows diagrammatically a second exemplary embodiment of a reciprocating piston device according to the invention,

Fig. 6 shows a second example of a piston ring configuration,

Figs. 6a and b show alternative details of the embodiment of Fig. 6,

Fig. 7 shows a further exemplary aspect of the invention,

Fig. 8 shows a further embodiment of the invention,

Fig. 9 shows an alternative embodiment of the invention,

Fig. 10 shows a sealing arrangement for a relatively movable shaft device, and

Fig. 11 shows the invention applied between two relatively rotatable parts.

Description of embodiments

In Fig. 1 is shown a reciprocating piston device in the form of a piston compressor 1 having a piston 2, a piston rod 23 and a cylinder 4. The piston 2, is reciprocally movable inside a cylinder wall 3, which is defined by a cylinder 4, having a cylinder head 12, wherein the usual valve arrangements are provided (not shown here but indicated at 14).

Also other kinds of per se known reciprocating piston devices, such as having an integral piston and piston rod and a

wobbling cylinder are of course within the scope of the invention.

The piston 2 carries a sealing ring in the form of a piston ring 5 near its top. Further, there is an enlarged portion 6 on the piston, said enlarged portion 6, being positioned axially at a greater distance than the piston ring 5, from the pressure chamber which in this case is a compression chamber 24, formed by the cylinder 3 and the cylinder head 12.

The enlarged portion 6 of the piston co-operates with an enlarged portion 7 of the cylinder, so that they together form a working chamber 8 which in operation works as a liquid pump for increasing the pressure of the medium being present in the working chamber 8 and in the slot 25 (Fig. 3) formed between the piston and cylinder, and in particular below the piston ring 5. The need of an external circulation pump can be eliminated because the cooling of the region of the sealing arrangement is accomplished through the invention.

Outside the cylinder lining 4 but inside a cylinder housing there is provided a cooling and liquid supply chamber 9 which communicates with the working chamber 8 over at least one liquid orifice 10 so that the cooling medium intended to flow outside the cylinder lining is also the medium in the space 8. Flow of liquid into the chamber 9 is conducted over a non return valve in order not to maintain a desired pressure in the working chamber 8 when the device is in operation. Preferably there is a certain overpressure in the liquid entering the working chamber over orifice 10. (This is also the case in the embodiment shown in fig 9, wherein a certain pressure should prevail in the inlet 10).

Fig. 2 shows the piston 2 when it has reached its top position with a minimal compression chamber space 24 and a minimal working chamber 8 for the enlarged portions of the cylinder and the piston.

5

It should be noted that the dimensions of the working chamber 8 have been exaggerated for clarity reasons. In practice the working space needs to be considerably smaller. As an example, in a compressor for carbon dioxide and water as balancing
10 medium, the volume of the working chamber 8 needs to be only from about one to a few % (about 1 - 4%) of the volume of the compression chamber.

15

In Fig. 3 the region of the piston ring in Figs. 1 and 2 is shown in more detail. This position is an upwardly moving position of the piston inside the cylinder. Because of the liquid pressure created in the working chamber 8 and prevailing in the ring shaped slot 25 between the piston and the cylinder, a flow of liquid will be formed in a radial slot
20 26, between the bottom side the piston ring 5 and the bottom surface of the piston ring groove 16. Hereby the piston ring will float on the liquid in said radial slot 26 under these circumstances. In this position the pressure in the slot 25 is equivalent to that of the compression chamber 24. In order to
25 provide for the pressure in the slot to enter into the radial slot 26, shallow radial grooves or the like may be arranged in one of the meeting surfaces of the ring an the bottom surface of the piston ring groove.

30

The liquid will subsequently pass into the inside of the piston 2 over an outlet channel 17, 18 being comprised, in this exemplary embodiment, of a number of radial bores 18 and an axial bore 17. Liquid is then transmitted, possibly in a

closed circuit, away from the piston through means that are not shown here.

As can be understood from this figure, cooling of the region of the sealing ring 5 is enhanced because of the passing liquid flow. This feature of the invention results in further extended working life of the device, since overheating of the components is avoided.

40 indicates a sealing lip extending inwardly from the ring 5 and sealing the compression chamber from being evacuated over the outlet channel 17, 18. An O-ring in this position could serve the same purpose.

In Fig. 4 the piston is shown in a position where the piston ring 5 with its bottom side abuts the bottom surface of the groove 16 so as to restrict and in some cases prevent liquid from flowing through the path indicated in and described in connection with Fig. 3. In this position, the pressure in the compression chamber exceeds that in the slot 25.

Normally, during the downward, suction, stroke of the piston, the pressure in the slot 25 will be lower than that of the compression chamber 24. The piston seal 5, will also work as a check valve for the liquid pumping function of the liquid working chamber 8 in Fig. 1.

In Fig. 5 the integral liquid supply device has been replaced with an external pressure liquid source 20, which communicates with the cylinder 3, over a channel 21, which in turn debouches at a position below the piston ring 5, which per se works similar to the piston ring shown in figs. 3 and 4, so as to provide balancing liquid pressure. This enables a constant

liquid flow without pulsation. In the embodiment, a further double sealing device 22, 22', is provided at the bottom part of the piston, so that an annular slot-shaped space 25, for increased pressure will be formed between the outside surface
5 of the piston 2, the cylinder 3, the piston seal 5, and the sealing device 22, 22'.

The sealing device 22, 22' may be comprised of a simple sealing ring 22 or a plural of sealing rings 22 in combination
10 with a slot-sealing arrangement 22'. Such a slot-sealing arrangement may as an example be comprised of a sealing bushing portion of the piston, forming, together with a co-operating portion of the cylinder, a narrow slot having a
15 width of as an example 15 μm . The sealing bushing also functions as a guide for the piston in operation of the compressor.

Many kinds of liquid pumps could be used as the external pump, for example: a gear type pump, a piston pump, an impeller
20 pump, a screw pump etc.

Fig. 6 shows an alternative standard piston seal, having a shallow, essentially V-shaped section for use with the invention. This piston seal will, like most of the other
25 seals, function as a valve, but with the difference that the radial inside edge of the ring 56, co-operates with openings 28, in the side of the groove 16, the opening areas of which increases with the distance from the bottom of the groove 16.

This embodiment like other embodiments has the advantage that liquid flow and floating effect can be fine-tuned in that the ring 26 will move axially with respect to the groove during
30 the piston cycle, so as to allow escape for the proper amount

of liquid during the different phases of the cycle. In general, in lower positions, the escape path is closed or restricted for liquid being supplied in a manner corresponding to the above embodiments. As the ring moves upwards in the
5 groove 16, the channels 27, opens up gradually.

In order to ensure that liquid pressure prevails also in the space 42, inside the lower edge 41 of the "V", The edge 41 is preferably provided with radial grooves (not shown) for
10 passage of liquid.

Figs. 6a and b show alternative details of the embodiment of Fig. 6, wherein the sealing ring, acts as a valve device by its radial inwardly directed edge portion (indicated with
15 interrupted lines and ref. sign 43) co-operating with the mouth 28 of an outlet channel. In the lowermost position the path is closed for liquid being supplied. In the uppermost position the path is entirely open.

20 Because of the forces on the piston ring being balanced, as an example, it may also be possible to use a sealing ring of the O-ring type. Care should, however be taken to position the outlet for the liquid below the center of the ring so as to avoid leakage between the two chambers for gas and liquid.

25 Fig. 7 shows an embodiment, wherein the pressure below the piston seal is coupled to the pressure inside the compression chamber over the valve device 29, allowing more freedom to chose the pressure and characteristics of the escape from
30 below the piston seal. The amount of liquid leaking can however be restricted properly by tuning the valve device. For example the magnitude of the pressure in the liquid may be

reduced so as to amount to only a minor part of the maximum compression pressure.

5 The invention is also applicable to reciprocal piston devices having a sealing ring disposed in a groove in the cylinder wall and acting against a meeting wall being formed by a reciprocating co-operating piston. This is shown diagrammatically in Fig. 8 with a sealing ring in connection with an integral working chamber 8, analogous to what is shown
10 in Fig 1.

An important part of the invention is the arrangement for maintaining the pressure below the sealing ring without causing unnecessary leakage of the balancing medium.

15 In Fig. 9, liquid from the area of the piston ring 5, is conducted over channels 18', 17' and 34 to a space 44 formed below a guide/seal bushing 32, which in principle functions as the sealing/guiding bushing 22' in fig 5, and a lower, low
20 pressure seal 35. Into the space 44, also enters liquid leaking from the chamber 8 over the seal bushing 32. 33 indicates a fluid outlet from the space 44 to a tank or a loop which in turn may be connected with the inlet 10 to the chamber 8. By having an evacuation area of the outlet 33 being
25 larger than the sum of the valving area defined by the piston ring 5 inside its groove together with the leakage area defined by the slot-sealing arrangement over the bushing 32, unwanted pressure build-up in the space 44 is eliminated.

30 The space 44 is thus exposed to a considerably lower pressure than prevails in the pressure chamber 3. In the space 44 prevails normally between atmospheric pressure and 5 bar. In this way, the low pressure seal 35 is only exposed to low

pressure differences and can therefore be of a simple design. Altogether the leakage from the device can be reduced to a minimum.

5 The lower sealing device in fig 9 may be used independently in other types of pressurizing devices such as liquid pumps. This is indicated in Fig. 10, in a liquid high pressure pump having a piston 5 working in a cylinder. A space 44 is formed below a guide/seal bushing 32 and a lower, low pressure seal 35. Into
10 the space 44 enters liquid leaking from the chamber 3 over the seal bushing 32. 33 indicates a fluid outlet from the space 44 to a tank or a loop which in turn may be connected with the inlet to the chamber 3. As is shown in Fig. 10, there is no sealing arrangement corresponding to the upper sealing ring in
15 Figs 1 - 9 provided on the piston nor is there any corresponding sealing ring provided in a similar position in the cylinder wall. The arrangement in Fig. 10 provides for a simple, effective pump for high (as well as for low) pressures with minimum leakage.

20 It is also envisaged to use the sealing arrangement in Fig. 10 not only as a seal for a reciprocating member but also as a seal for a rotational element such as a shaft, wherein possible leaking medium can be collected in a similar way as
25 is described above. In that case there is a first, high pressure seal and a second, low pressure seal with an intermediate space 44 having an outlet to tank or the similar or for recirculation.

30 Above the invention has been described at the background of seals in general and piston rings in particular against a cylinder wall, but the invention is applicable to sealing arrangements for relatively movable parts in general such as

also for relatively rotatable parts such as shaft sealing arrangements. Parts having a combination of rotation and reciprocation can also be sealed with a sealing arrangement according to the invention. In fig. 11, a sealing arrangement
5 60 is shown for sealing between a first part which is a rotatable shaft 61 passing an opening in a housing 62 forming the second part. A separate bearing may also be included at this position. A sealing ring 63 seals between a first side 65 and a second side 70. Liquid is supplied to said second side
10 through the channel 64. A bushing 66 provides for slot sealing arrangement so that leakage in the direction to the right in the figure is restricted. Leaking liquid is allowed to escape from an intermediate space 68 where atmospheric pressure prevails through the channel 67 to tank so as to possibly be
15 reused. A sealing element such as an O-ring 69 is provided outermost in the opening. The pressure in the space at the second side 70 can be regulated through a floating sealing ring (63) as in figs 3 and 4 or by a valve equivalent to what as indicated in connection with fig 7.

20 Among other things, the invention makes it possible to provide lubricant-free compressors having a long lifetime, in particular for high pressure compressors in the area of 100 bar or more. The lifetime of the piston seal of a previously
25 known compressor is dependent on compression pressure and traveled distance. The invention makes it possible to balance the pressure in such a way that the forces, with which the sealing ring is applied against the meeting wall as well as twisting and pulsating forces are reduced, whereby the
30 lifetime of the sealing ring may be increased as well as the periods between maintenance and exchange.

This effect is enhanced through the continuous cooling of the piston and the sealing ring, which is provided through one aspect of the invention. Hereby it is enabled that the cylinder, the piston and the sealing ring maintains
5 essentially equivalent temperatures.

It is further possible to supply liquid through a rotating shaft or inside a reciprocating piston in order to ensure balancing of the sealing ring.
10

It is also possible to lead liquid through the piston and in particular to the region of the piston pin bearing so as to ensure cooling of the piston pin and bearing and the surrounding part of the piston.
15

Sealing arrangements are normally preloaded against the surface against which they are intended to seal. In pressurizing devices, such as compressors, this load is increased because of increased pressure resulting in increased
20 friction and wear. According to the invention, the load against the cylinder surface may be limited and held relatively constant at a preset level, resulting in reduced wear and reduced friction.

Hereby a compressor, according to the invention, is less sensitive for surface smoothness and quality of the cylinder lining compared to previously known devices.
25

The invention is applicable in numerous applications. In particular the following markets are attractive for a
30 lubricant free compressor:

- breathing air for divers, fire brigades, hospitals etcetera
- Oxygen, wherein the minimal oil pollution means a risk of explosion and other gases, where oil and a lubricant is not permitted
- compressors for the manufacture of PET bottles and other products where even the smallest contamination of oil ruins the products
- industrial processes requiring absolutely pure air. For example electronics industry
- CO₂ for the new generation of commercial washing machines using liquid CO₂ as detergent.
- post mix apparatus for dispensing beverages
- filling of gases for the food industry, such as CO₂ for all bars, restaurants, breweries, protective gases for food production, food preservation, etcetera.

For several of the above applications, clean water is used as the liquid since this is tolerated in the compressed gas. It is already common practice to add a drying step after a compressor in order to obtain gas with reduced liquid/water contents. For instance, normal air mostly contains water that is condensed as the air is cooled down after compression and thereafter separated.

In other applications any other suitable liquid can be used after the demand in the particular field. The advantage with the invention is that the liquid mostly serves as a source of transferring the energy to balance the pressure on the seals and therefore diminishes the need for a high grade lubricant. In this way a liquid can be used that does not chemically interfere or adsorbs by the pumped media.

In respect of sealing rings having an axially extending
 outside surface being applied against the meeting wall,
 according to the invention, virtually the same pressure will
 prevail on the entire side of the sealing ring directed from
 5 the meeting wall as a contrast to, as in the case with the
 previously known device, there is a pressure gradient between
 pressurizing chamber pressure and the much lower pressure
 along the axial extension of the outside surface of the
 sealing ring. This will ensure better pressure balance between
 10 the radial forces acting on the sealing ring.

Although the invention in particular has been described at the
 background of compressors, the invention is also applicable to
 all kinds of devices having relatively movable parts such as
 15 rotatable. In case of reciprocal piston devices, other piston
 pressurizers, piston engines such as steam engines, other
 types of piston-cylinder motors etc. are within the range of
 the invention.

Claims:

1. Sealing arrangement for two relatively movable first and second parts and including a sealing ring positioned on one of the parts for sealing contact against the other one of the parts, so as to restrict leakage from a first side of the sealing ring where a higher pressure prevails to a second side of the sealing ring, **characterized in** means for liquid supply for supplying liquid under pressure to the second side of the sealing ring in order to counteract forces on the sealing ring resulting from the pressure prevailing on the first side of the sealing ring.
2. Arrangement according to claim 1, wherein the sealing ring is positioned in a sealing ring seat formed as a groove in the circumference of one of the parts.
3. Arrangement according to claim 1 or 2, including a valve device which is set to limit the pressure of the supplied liquid in the area of the sealing ring.
4. Arrangement according to claim 3, wherein the valve device is set to limit the pressure to about 80 - 100% of the pressure inside the pressure chamber.
5. Arrangement according to any of the claims 2 - 4, **characterized in** that the valve device is comprised of a portion of the sealing ring in co-operation with the sealing ring seat.
6. Arrangement according to claim 5, **characterized in** that said portion of the sealing ring is a ring surface directed

from the first side which is arranged to co-operate with a surface of said seat.

5 7. Arrangement according to claim 5, **characterized in** that said portion of the sealing ring is an edge portion directed radially from the element it is intended to seal against.

10 8. Arrangement according to claim 3, **characterized in** that the valve device is a pressure controlled valve which is separate from the sealing ring.

15 9. Arrangement according to any of the claims 1 - 8, **characterized in** a sealing device for sealing between the relatively movable parts in a position opposite to the sealing ring as seen from the position of liquid supply through the means for liquid supply.

20 10. Arrangement according to claim 9, wherein said sealing device is formed by a first, high pressure seal member (32) and a second, low pressure seal (35), and an intermediate space (44) having a fluid outlet (33).

25 11. Arrangement according to claim 10, wherein the fluid outlet is a low pressure outlet for eliminating pressure build-up in the intermediate space (44).

12. Arrangement according to any of the claims 1 - 11, wherein the first and second parts are relatively reciprocating.

30 13. Arrangement according to claim 12, wherein the first and second parts are a cylinder and a piston forming a pressure chamber.

14. Arrangement according to any of the claims 1 - 11, wherein the first and second parts are relatively rotatable.

5 15. Arrangement according to any of the claims 1 - 14, wherein at least one of the parts includes at least one outlet channel for supplied liquid.

16. Reciprocating piston device including a cylinder and a relatively movable piston and a sealing ring which is positioned in a seat formed as a groove in the circumference
10 of one of the piston and the cylinder for sealing contact between the piston and the cylinder, said piston and cylinder forming a pressure chamber, **characterized in** a liquid supply device for supplying liquid under pressure to a side of the sealing ring that is directed from the pressure chamber in
15 order to counteract forces on the sealing ring resulting from pressure inside the pressure chamber.

17. Device according to claim 16, **characterized in** that the liquid supply device includes an enlarged piston portion for
20 co-operation with an enlarged cylinder portion.

18. Device according to claim 17, **characterized in** that a working chamber which is formed by said piston and cylinder portions is ring-shaped.

25 19. Device according to claim 16, **characterized in** that the liquid supply device includes an external pump having supply conduit (-s) debouching in any element from the group: a cylinder wall, a crankcase, a piston wall.

30 20. Device according to claim 19, **characterized in** that the liquid supply device includes any liquid pump such as: for

example a gear type pump, a reciprocating piston pump, an impeller pump, a screw pump or a rotary piston pump.

21. Device according to any of the claims 16 - 20,

5 **characterized in** that the piston includes a valve device which is set to limit the liquid pressure in the area of the sealing ring.

22. Device according to claim 21, **characterized in** that the
10 valve device is set to limit the pressure to about 80 - 100% of the pressure inside the pressure chamber.

23. Device according to claim 21 or 22, **characterized in** that
15 the valve device is comprised of a portion of the sealing ring in co-operation with its seat.

24. Device according to claim 23, **characterized in** that said
20 portion of the sealing ring is a ring surface directed from the pressure chamber which is arranged to co-operate with a surface of said seat.

25. Device according to claim 23, **characterized in** that said
25 portion of the sealing ring is an edge portion directed radially from the element it is intended to seal against.

26. Device according to any of the claims 16 - 25,
characterized in that the piston includes at least one outlet
channel for liquid.

30 27. Device according to any of the claims 16 - 22,
characterized in that the valve device is a pressure controlled valve which is separate from the sealing ring.

28. Device according to any of the claims 16 - 27,
characterized in a sealing device for sealing between the
 piston and the cylinder in a position opposite to the sealing
 ring as seen from the position of liquid supply through the
 5 liquid supply device.




29. Device according to claim 28, wherein said sealing device
 is formed by a first, high pressure seal member (32) and a
 second, low pressure seal (35), and an intermediate space (44)
 10 having a fluid outlet (33).

30. Sealing device between a movable and a stationary member,
 and including a first, high pressure seal member (32) and a
 second, low pressure seal (35), and an intermediate space
 15 (44), wherein liquid leaking from a position at the other side
 of the first seal member as seen from the space (44) is
 allowed to enter into the space (44), and wherein a fluid
 outlet (33) from the space (44) is provided.

Abstract:

A sealing arrangement for two relatively movable first and second parts and including a sealing ring is positioned on one of the parts for sealing contact against the other one of the parts, so as to restrict leakage from a first side of the sealing ring where a higher pressure prevails to a second side of the sealing ring. Means for liquid supply are provided for supplying liquid under pressure to the second side of the sealing ring in order to counteract forces on the sealing ring resulting from the pressure prevailing on the first side of the sealing ring. The invention also concerns a reciprocating piston device including such a sealing arrangement.

Fig 1.

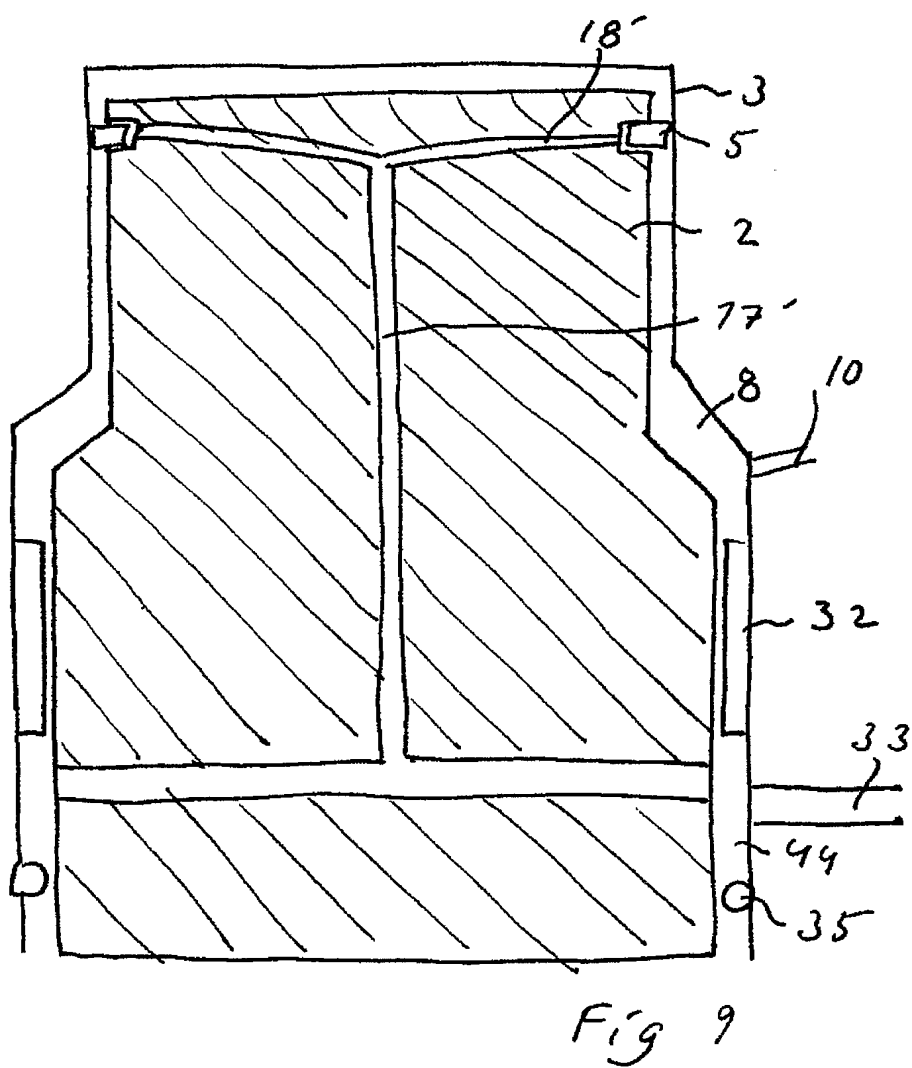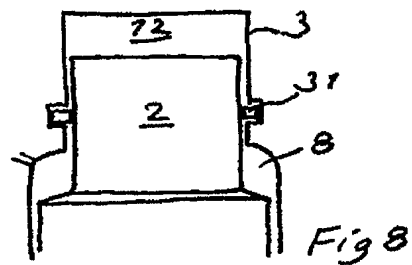

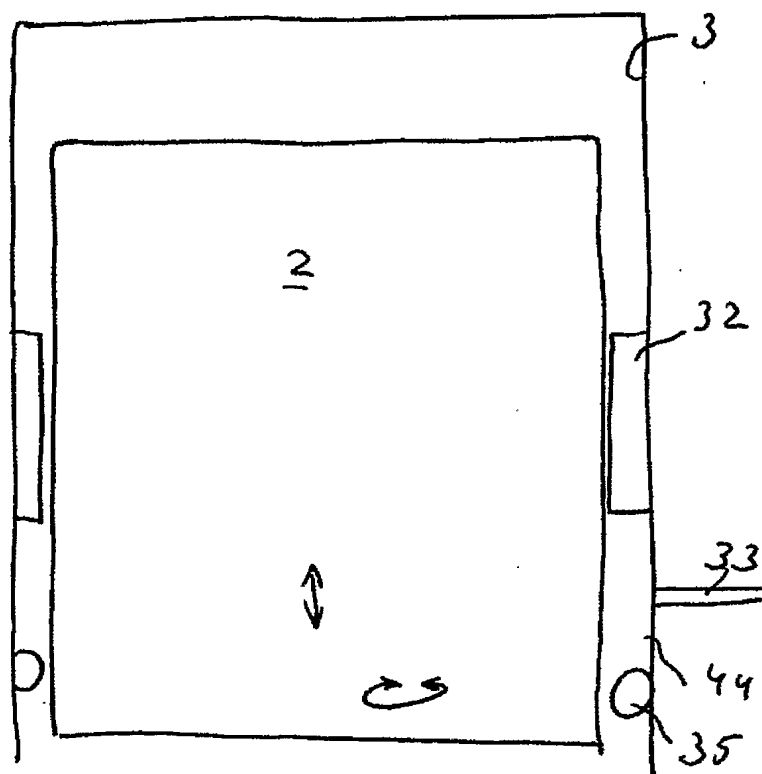


Fig 10

